

Terrestrial Laser Scanning

**NEW**



# RIEGL VZ-6000i<sup>26</sup>


The Ultimate Long Range Laser Scanner  
Optimized for Snow/Ice Applications



# RIEGL VZ<sup>®</sup>-6000i<sup>26</sup>

RIEGL's latest generation of professional Terrestrial Laser Scanners stands for extreme versatility, high productivity, ultimate performance, and smart connectivity – providing an excellent return on investment!

Benefit from RIEGL's latest Long Range Laser Scanner:




## Increase Productivity

- on-board processing / computing
- One-Touch button operation
- customized workflows and pre-settings
- efficient workflow from survey to data
- real-time registration enabled by IMU/GNSS




## Rely on Performance

- superior long range scanning performance – up to 6000 m
- IP64 certified especially for harsh environments
- multiple target capability
- additional data attributes



## Experience Versatility

- various applications and survey routines
- internal camera
- internal IMU for pose estimation
- optional external GNSS RTK receiver
- prepared for user specific Python apps
- pre-installed RIEGL apps



## Enable Connectivity

- Integrated WiFi
- high speed data download of up to 500 MB/sec via TCP/IP
- automatic and fast data transfer with CF-express card
- cloud data synchronization via internet
- exchange formats for further analysis

# Key Applications

The new *RIEGL VZ-6000i<sup>26</sup>* is optimized for snow and ice applications, featuring reliable and robust automatic real-time on-board registration.




## Mining (even under extreme winter conditions)

- surveying
- monitoring
- planning
- surveillance

## Landscapes

- glacier monitoring
- avalanche risk monitoring
- polar projects

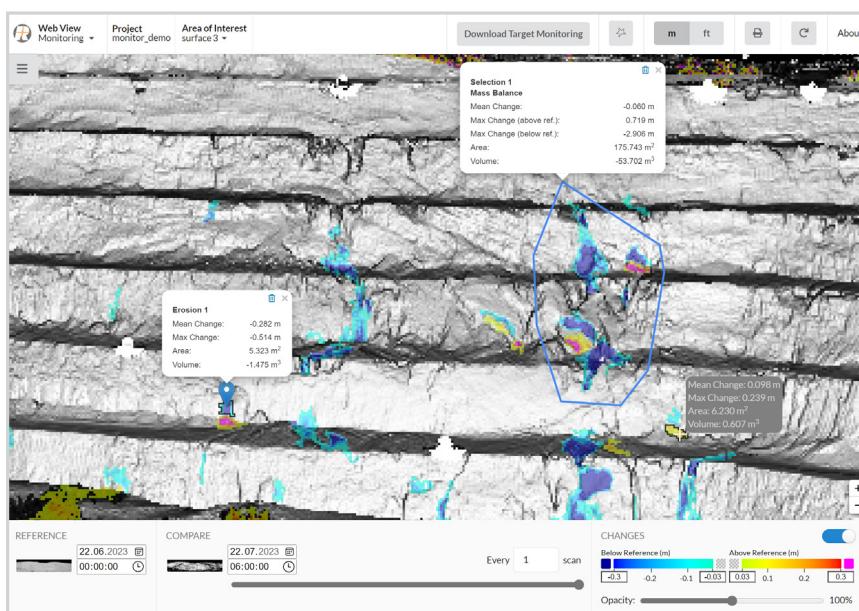

web viewer Monitor+ App

## Customized Apps

- design and implementation of elaborated workflows
- automatic on-board data processing
- visualization of results via web viewer


### RIEGL Monitoring Apps



# High Productivity – Rapid Data Acquisition

A wide variety of data acquisition scenarios require tailored data collection and processing strategies. The subsequent analysis is supported by the use of onboard customized apps and offboard software (RiSCAN PRO and RiMINING).

Define your specific scan routines and processing sequences and start data acquisition, processing, and analysis with a single click!

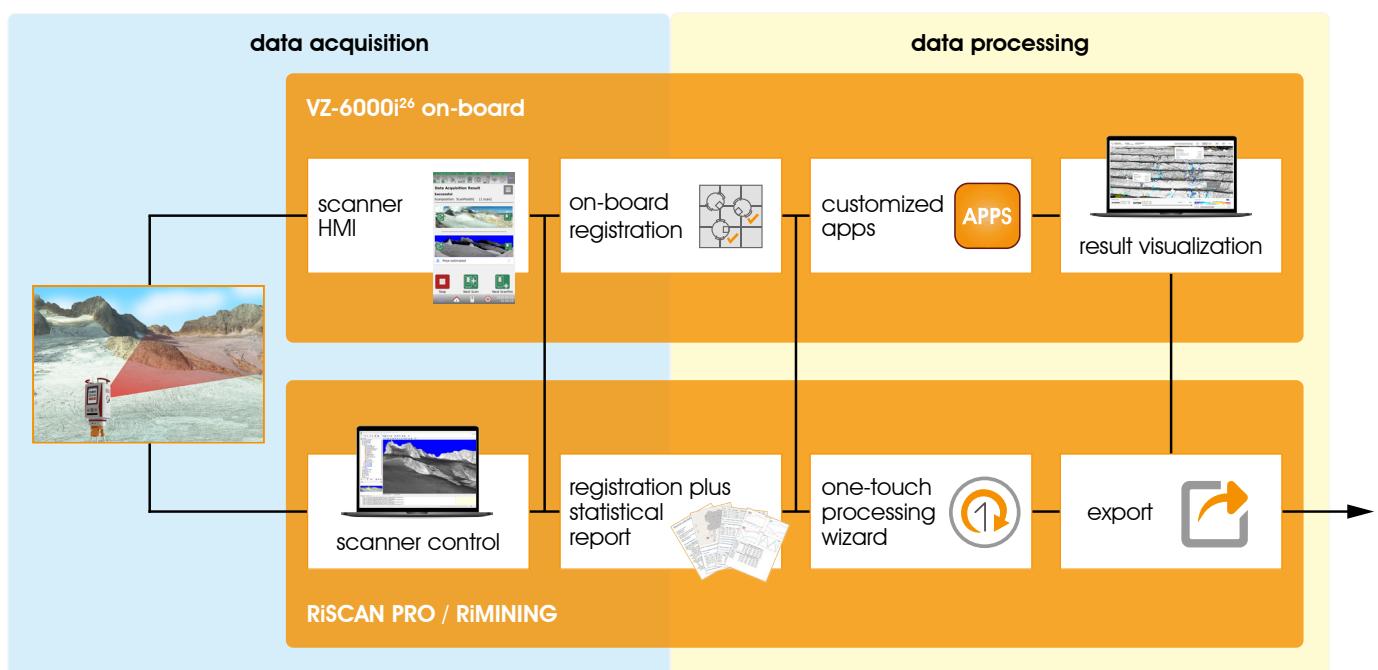


Depending on different survey scenarios, single workflow components of the VZ-6000i<sup>26</sup> and RiSCAN PRO / RiMINING can be combined to optimize data acquisition and processing.


# High Productivity – Smart Data Processing

Your RIEGL VZ-6000i<sup>26</sup> optimizes the entire workflow of data acquisition and processing: Its internal dual processing platform enables data and image acquisition as well as registration, geo-referencing, and analysis in parallel.

Benefit from automatic visualization and control options via the project map app!

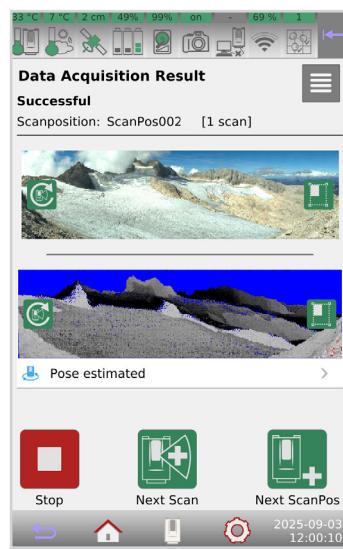


RIEGL VZ-6000i<sup>26</sup> Screen  
or VZ-i Series App

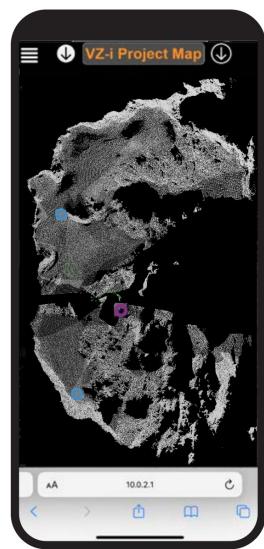


VZ-i Project Map App

## Key Features of the Data Processing Software RiSCAN PRO / RiMINING:


- One-Touch Processing Wizard
- fast download from the CF-Express Card (up to 500 MB/sec)
- automatic filtering (vegetation and objects, deviation, reflectance, multiple targets, etc.)
- automatic colorization of the point cloud
- generation of DTM (Digital Terrain Model)
- extraction of contour lines, break lines, and cross sections
- volume calculation, surface comparison
- export as RiPANO project
- export in data format e57, LAS, etc.
- automatic generation of PDF reports

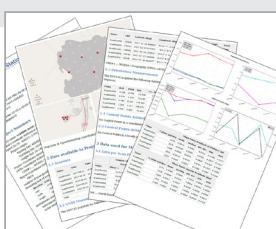


PDF reports

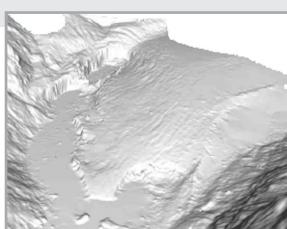

DTM  
(Digital Terrain Model)

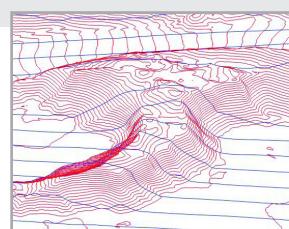

contour lines, break lines,  
cross sections

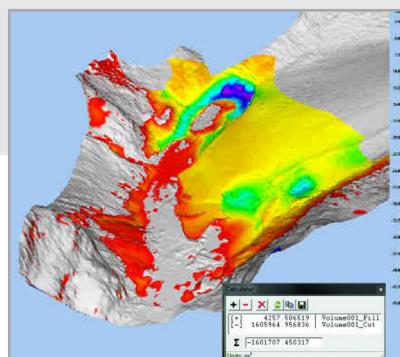

volume calculation, surface  
comparison

# Key Components

## Front View



beam exit window  
integrated camera for high resolution panorama images

## Rear View



7 inch touch screen (1280 x 800 pixel)  
single button for convenient handling  
2 independent power supply connections

## Optional Equipment

### RIEGL GNSS RTK Receiver, Ri-RTKM-46



By attaching the optional GNSS RTK receiver, absolute positioning accuracy can be improved to 1-2 cm.

The correction data is received via WiFi.

### Rechargeable Batteries

The RIEGL VZ-6000i<sup>26</sup> can be connected to the following optionally available rechargeable batteries:

- RIEGL Add-On Rechargeable Li-Ion Battery RBLI 2900 (3 x 99 Wh)
- NiMH Battery (235 Wh)



RIEGL RBLI 2900



NiMH Battery

### Optional Equipment



# Ultimate Performance – Technical Data

## Laser Product Classification



### Class 3B Laser Product according to IEC 60825-1:2014

The following clause applies for instruments delivered into the United States:  
Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed.3., as described in Laser Notice No. 56, dated May 8, 2019.

## Range Measurement Performance

Measuring Principle / Mode of Operation	time of flight measurement, echo signal digitization, online waveform processing			
<b>Laser Pulse Repetition Rate (PRR) – (peak)</b> <sup>1)</sup>	50 kHz	150 kHz	300 kHz	500 kHz
<b>Max. Measuring Range</b> <sup>2)</sup> natural targets $\rho \geq 90\%$ natural targets $\rho \geq 60\%$ natural targets $\rho \geq 20\%$	6000 m 5300 m 3700 m	4250 m 3700 m 2450 m	3350 m 2900 m 1850 m	2750 m 2350 m 1500 m
<b>Minimum Range</b> <sup>3)</sup>	5 m	5 m	5 m	5 m
<b>Max. Number of Targets per Pulse</b> <sup>4)</sup>	15	15	15	15
<b>NOHD (Nominal Ocular Hazard Distance)</b>	228 m	113 m	66 m	43 m
<b>ENOHD (Extended Nominal Ocular Hazard Distance)</b>	1851 m	1026 m	676 m	469 m
<b>Ranging Accuracy</b> <sup>5) 7)</sup>	15 mm			
<b>3D Position Accuracy</b> <sup>8)</sup>	10 mm @ 100 m			
<b>Precision</b> <sup>6) 7)</sup>	10 mm			
<b>Laser Wavelength</b>	near infrared, invisible			
<b>Laser Beam Divergence</b>	0.12 mrad <sup>9)</sup> / 0.08 mrad <sup>10)</sup>			

1) Rounded values.

2) Typical values for average conditions. Maximum range is specified for flat targets with size in excess of the laser beam diameter, perpendicular angle of incidence, and for atmospheric visibility of 23 km. In bright sunlight, the max. range is shorter than under overcast sky.

3) Minimum range specified for vertical zenith angles from 60 deg to 120 deg, resp. 60° vertical field of view.

4) If more than one target is hit, the total laser transmitter power is split and, accordingly, the achievable range is reduced.

5) Accuracy is the degree of conformity of a measured quantity to its actual (true) value.

6) Precision, also called reproducibility or repeatability, is the degree to which further measurements show the same result.

7) 1 sigma @ 1000 m range under RIEGL test conditions.

8) 1-sigma value, based on target modelling, under RIEGL test conditions.

9) Measured at the 1/e<sup>2</sup> points. 0.12 mrad corresponds to an increase of 12 mm of beam diameter per 100 m distance.

10) Measured at the 1/e points. 0.08 mrad corresponds to an increase of 8 mm of beam diameter per 100 m distance.

## Scanner Performance

	Vertical (Line) Scan	Horizontal (Frame) Scan
<b>Scan Angle Range</b>	total 60° (+30° / -30°)	max. 360°
<b>Scanning Mechanism</b>	rotating / oscillating lightweight mirror	rotating head
<b>Scan Speed</b> <sup>11)</sup>	250°/sec to 14400°/sec (max. 20 rev/sec)	0°/sec to 60°/sec <sup>12)</sup>
<b>Angular Step Width</b> <sup>11)</sup> $\Delta\theta$ (vertical), $\Delta\phi$ (horizontal) <b>User defineable Resolution</b>	0.005° $\leq \Delta\theta \leq 0.28°$ between consecutive laser shots	0.005° $\leq \Delta\phi \leq 3°$ between consecutive scan lines
<b>Angular Accuracy</b> <sup>13)</sup>	0.0028° (10 arcsec)	0.0028° (10 arcsec)
<b>Angle Measurement Resolution</b>	better 0.0005° (1.8 arcsec)	better 0.0005° (1.8 arcsec)

11) Selectable, depending on the selected measurement program.

13) 1-sigma value, based on target modeling, under RIEGL test conditions.

12) Frame scan can be disabled, providing 2D scanner operation.

Technical Data to be continued at page 8

## Scanner Performance (continued)

<b>Orientation Sensors<sup>1)</sup></b>	integrated 3-axis accelerometer, 3-axis gyroscope, 3-axis magnetometer (compass), barometer
<b>Accuracy of the Tilt Measurement</b>	± 0.008° <sup>2)</sup>
<b>GNSS Receiver</b>	optional external RIEGL GNSS RTK receiver
<b>Waveform Data Output (optional)</b>	providing digitized echo signal information for specific target echoes
<b>Data Storage</b>	integrated SSD 2 TByte, removable CF-Express card 512 GByte (1 TByte optionally available), automatic sync while scanning
<b>Cloud Storage</b>	NAS, FTP-Server, Amazon S3, Microsoft Azure
<b>On-board Registration</b>	automatic scan data registration as background process while scanning

1) Orientation data available for any 3D attitude of the device.

2) 1-sigma value, for vertical scanner setup position (tilt range of ± 5°), under RIEGL test conditions.

## Scanner Control

<b>via Laser Scanner</b>	7 inch touch screen, 1280 pixel x 800 pixel
<b>via Mobile Device (WiFi)</b>	„RIEGL VZi-Series“-App, available for iOS and Android
<b>via TCP/IP</b>	RIEGL software packages RiSCAN PRO and RiMINING
<b>via ROS</b>	ROS (Robot Operation System) driver available

## Camera

<b>Internal Camera</b>	12 MPix CMOS color camera, FOV 8.1° x 6.4° (v x h) The camera field of view is dynamically deflected via the scan mirror. This allows a 60° x 360° panoramic image to be captured with total resolution of ~ 5000 MPixel. This corresponds to a pixel resolution of 3.7 cm in 1000 m range.
------------------------	--

## General Technical Data

<b>External Power Supply</b>	input voltage 11 - 34 V DC up to two independent external power sources can be connected simultaneously for uninterrupted operation, in addition to the RIEGL Add-On Li-Ion battery RBLI 2900
<b>Power Consumption</b>	typ. 75 W, max. 90 W (without external devices)
<b>Main Dimensions (width x height x depth)</b>	244 mm x 456 mm x 213 mm
<b>Weight</b>	<b>13 kg / 28.7 lbs</b>
<b>Humidity</b>	max. 80 % non condensing @ +31 °C
<b>Protection Class</b>	<b>IP64, dust-tight and splash proof</b>
<b>Temperature Range Storage / Operation</b>	-10 °C up to +50 °C / 0 °C up to +40 °C: standard operation -20 °C: continuous scanning operation if instrument is powered on while internal temperature is at or above 0 °C and still air -40 °C: scanning operation for about 20 minutes if instrument is powered on while internal temperature is at or above 15 °C and still air
Low Temperature Operation <sup>3)</sup>	

3) Insulating the scanner with appropriate material will enable operation at even lower temperatures.

### Contact us



**RIEGL Laser Measurement Systems GmbH**, Headquarters  
**RIEGL USA Inc.**, Headquarters North America

**RIEGL Japan Ltd.** | **RIEGL China Ltd.** | **RIEGL Australia Pty Ltd.** | **RIEGL Canada Inc.** | **RIEGL UK Ltd.**

**RIEGL Asia Pacific Ltd.** | **RIEGL South America SpA** | **RIEGL Deutschland Vertriebsgesellschaft mbH**

**RIEGL France SAS**